


VF3 Compression

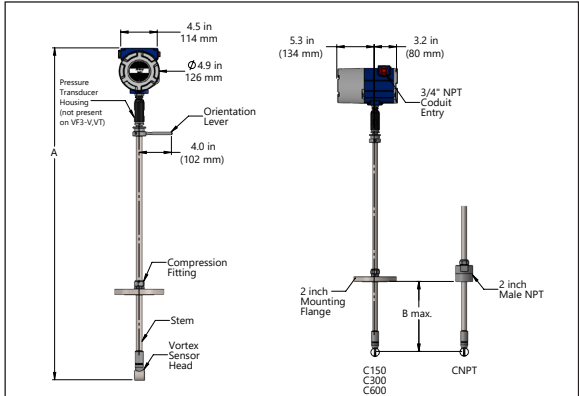

| VortiFox VF3 Insertion Meter Weight  |             |             |             |
|--------------------------------------|-------------|-------------|-------------|
| Connection Size                      | CL          | SL          | EL          |
| CNPT / Compression / 2-in Male NPT   | 13 (5.7)    | 14.0 (6.2)  | 15.0 (6.7)  |
| C150 / Compression / 150 lb. Flange  | 15 (6.8)    | 16.0 (7.3)  | 17.0 (7.8)  |
| C300 / Compression / 300 lb. Flange  | 17 (7.8)    | 18.0 (8.3)  | 19.0 (8.8)  |
| C600 / Compression / 600 lb. Flange  | 18 (8.2)    | 19.0 (8.7)  | 20.0 (9.2)  |
| C900 / Compression / 900 lb. Flange  | 31.0 (14.1) | 32.0 (14.5) | 33.0 (15.0) |
| C16 / Compression / DN50 PN16 Flange | 15 (6.8)    | 16.0 (7.3)  | 17.0 (7.8)  |
| C40 / Compression / DN50 PN40 Flange | 17 (7.8)    | 18.0 (8.3)  | 19.0 (8.8)  |
| C63 / Compression / DN50 PN63 Flange | 18 (8.2)    | 19.0 (8.7)  | 20.0 (9.2)  |

Add 11lb (5kg) for remote electronics.

| VortiFox VF3 Insertion Meter Sizes - V, VT, VTEP, VETEP |               |            |                |            |                |            |
|---------------------------------------------------------|---------------|------------|----------------|------------|----------------|------------|
| Model Code / Probe Seal / Process Connection            | Compact Probe |            | Standard Probe |            | Extended Probe |            |
|                                                         | A             | B          | A              | B          | A              | B          |
| CNPT / Compression / 2-in Male NPT                      | 21.6 (549)    | 9.8 (249)  | 38.0 (965)     | 26.2 (665) | 50.0 (1270)    | 38.2 (970) |
| C150 / Compression / 150 lb. Flange                     | 21.6 (549)    | 10.9 (277) | 38.0 (965)     | 27.3 (693) | 50.0 (1270)    | 39.3 (998) |
| C300 / Compression / 300 lb. Flange                     | 21.6 (549)    | 10.8 (274) | 38.0 (965)     | 27.2 (691) | 50.0 (1270)    | 39.2 (996) |
| C600 / Compression / 600 lb. Flange                     | 21.6 (549)    | 10.4 (264) | 38.0 (965)     | 26.8 (681) | 50.0 (1270)    | 38.8 (986) |
| C900 / Compression / 900 lb. Flange                     | 21.6 (549)    | 9.9 (251)  | 38.0 (965)     | 26.3 (668) | 50.0 (1270)    | 38.3 (973) |
| C16 / Compression / DN50 PN16 Flange                    | 21.6 (549)    | 10.9 (277) | 38.0 (965)     | 27.3 (693) | 50.0 (1270)    | 39.3 (998) |
| C40 / Compression / DN50 PN40 Flange                    | 21.6 (549)    | 10.8 (274) | 38.0 (965)     | 27.2 (691) | 50.0 (1270)    | 39.2 (996) |
| C63 / Compression / DN50 PN63 Flange                    | 21.6 (549)    | 10.4 (264) | 38.0 (965)     | 26.8 (681) | 50.0 (1270)    | 38.8 (986) |

| VortiFox VF3 Insertion Meter Sizes - VTP     |               |            |                |            |                |            |
|----------------------------------------------|---------------|------------|----------------|------------|----------------|------------|
| Model Code / Probe Seal / Process Connection | Compact Probe |            | Standard Probe |            | Extended Probe |            |
|                                              | A             | B          | A              | B          | A              | B          |
| CNPT / Compression / 2-in Male NPT           | 24.6 (625)    | 9.8 (249)  | 41.0 (1041)    | 26.2 (665) | 53.0 (1346)    | 38.2 (970) |
| C150 / Compression / 150 lb. Flange          | 24.6 (625)    | 10.9 (277) | 41.0 (1041)    | 27.3 (693) | 53.0 (1346)    | 39.3 (998) |
| C300 / Compression / 300 lb. Flange          | 24.6 (625)    | 10.8 (274) | 41.0 (1041)    | 27.2 (691) | 53.0 (1346)    | 39.2 (996) |
| C600 / Compression / 600 lb. Flange          | 24.6 (625)    | 10.4 (264) | 41.0 (1041)    | 26.8 (681) | 53.0 (1346)    | 38.8 (986) |
| C900 / Compression / 900 lb. Flange          | 24.6 (625)    | 9.9 (251)  | 41.0 (1041)    | 26.3 (668) | 53.0 (1348)    | 38.3 (973) |
| C16 / Compression / DN50 PN16 Flange         | 24.6 (625)    | 10.9 (277) | 41.0 (1041)    | 27.3 (693) | 53.0 (1348)    | 39.3 (998) |
| C40 / Compression / DN50 PN40 Flange         | 24.6 (625)    | 10.8 (274) | 41.0 (1041)    | 27.2 (691) | 53.0 (1348)    | 39.2 (996) |
| C63 / Compression / DN50 PN63 Flange         | 24.6 (625)    | 10.4 (264) | 41.0 (1041)    | 26.8 (681) | 53.0 (1348)    | 38.8 (986) |